

# Motion Sensor

## Set Up Your Motion Sensor

### 1 Choose a Location

Place the sensor at least 6 feet high, away from heat sources, and pointed away from windows.

Clean and dry the mounting area.

### 2 Pair the Sensor

Pull the battery tab.

From the Panel home screen, select Settings (☰) → Devices → Add Device (+) → Motion.


Press the pairing button on the sensor. Name and confirm location.

### 3 Install the Sensor

Peel adhesive and press firmly on the hard plastic casing to install.

Continue to Adjust Sensitivity →

Pull Tab

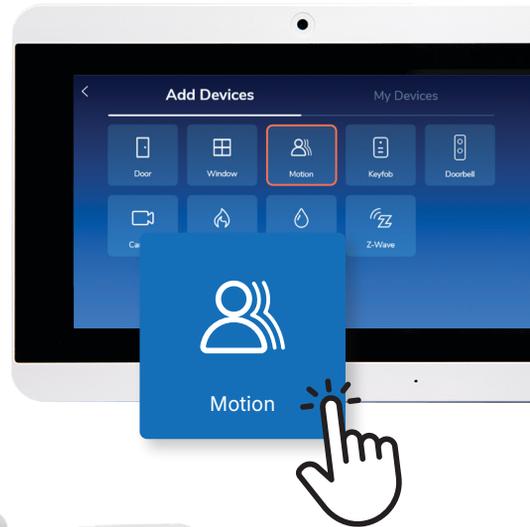

Motion Sensor  
Video Guide

800-574-7798

[www.shieldpro.com/setup](http://www.shieldpro.com/setup)

#### 4 Optional: Adjust Sensitivity

Bypass the sensor on the Security Panel.

Remove the back cover of the sensor.

Adjust jumpers for:


**Pet size:** up to 33 lb or up to 55 lb

**Coverage:** 13 ft or 26 ft

Reassemble and reactivate the sensor.

Your Motion Sensor is ready.

## Adjust Sensitivity

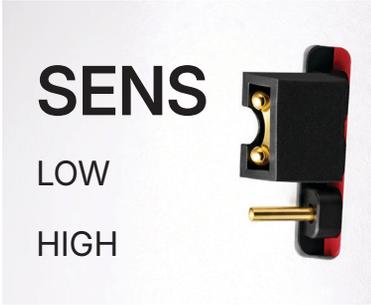Pets	Coverage
<p data-bbox="104 930 289 968">Up to 33 lbs.</p>  <p data-bbox="304 1045 425 1104"><b>PET</b></p> <p data-bbox="304 1140 415 1178">33 LBS</p> <p data-bbox="304 1209 415 1247">55 LBS</p>	<p data-bbox="551 930 786 968">Low - max 13 ft.</p>  <p data-bbox="596 1045 768 1104"><b>SENS</b></p> <p data-bbox="596 1140 672 1178">LOW</p> <p data-bbox="596 1209 679 1247">HIGH</p>
<p data-bbox="104 1325 289 1362">Up to 55 lbs.</p>  <p data-bbox="304 1440 425 1499"><b>PET</b></p> <p data-bbox="304 1535 415 1572">33 LBS</p> <p data-bbox="304 1604 415 1642">55 LBS</p>	<p data-bbox="551 1325 796 1362">High - max 26 ft.</p>  <p data-bbox="596 1440 768 1499"><b>SENS</b></p> <p data-bbox="596 1535 672 1572">LOW</p> <p data-bbox="596 1604 679 1642">HIGH</p>