ShieldPro

Ready to Arm
Doors and windows are closed

Staying

Leaving

Disarmed

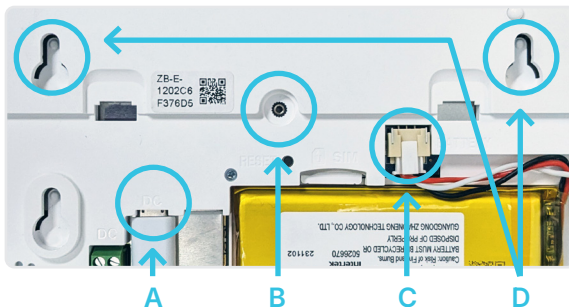75° Cooling · SOS

What is Included:

Panel	Countertop stand
Power adapter plug	Outlet screw
Panel security screw	Screwdriver
Panel wall-mount bracket	Wall screws **(5)**
Plug mounting bracket	Wall anchors **(5)**
	Zip tie

FIGURE 1

Reverse of Panel, Cover Removed

A   B   C   D

A. Power adapter plug   **C.** Battery plug

B. Locking screw   **D.** Mounting slots

Security Panel

The ShieldPro Home Security panel manages all paired ShieldPro devices with the press of a few buttons.

1. Connect the Battery and Power Adapter

The panel requires constant power to function properly. The battery can last for up to 24 hours in the event of power failure.

STEP 1

Remove the back cover from the panel (see **Figure 1**).

STEP 2

Plug in the battery and the power adapter (**Fig. 1, A.**). Check whether the battery plug connection is secure (**Fig. 1, C.**).

STEP 3

Replace cover.

2. Set Up the Panel

STEP 1

Plug in the panel's power cable to the wall.

> Recommended: To secure the power adapter to the wall, see **Securing the Power Adapter** (page 2).

STEP 2

Follow the prompts on the panel to start setting up your account and pairing devices.

> Note: The wired doorbell requires power to pair with the panel. Install the doorbell before pairing it with the panel. See **Adding more devices later** to pair your doorbell after it's installed.

STEP 3

(Optional) Create more users as needed. Complete initial panel setup before new users can be added. See **How to add users** for details.

3. Mount the panel

STEP 1
Select your stand.

Countertop stand:

1. Insert the stand hooks into the mounting slots, (**Fig. 1, C.**).

2. Slide up firmly until the stand locks into place.

Wall bracket:

1. Mount the bracket to the wall with the provided wall screws and anchors.

2. Insert the stand hooks into the mounting slots, (**Fig. 1, C.**).

3. Slide down firmly until the stand locks into place.

STEP 2
Attach panel to the stand.

How to Add More Devices at any time

> **Settings** *(☰)* **> Devices > + >** *Select the type of sensor or device > Follow the prompts to pair the device.*

How to Add Users

STEP 1
After devices have been added:

> **Settings** *(☰)* **> Devices > + >** *Select the type of user > Follow the prompts to create a new user.*

STEP 2
Share passcode and details with the new user.

User Types
Determine what type of user you would like to add.

Member User: can arm or disarm the system at any time.

Scheduled User: can arm or disarm the system according to a schedule you create. No access outside of the permitted schedule.

Temporary User: can arm or disarm until a certain date and time. After that date, this user can no longer arm or disarm the system.

Power adapter and bracket, secured with zip tie

Securing the Power Adapter

STEP 1
Remove the screw from the outlet cover plate.

STEP 2
Align plug mounting bracket screw hole with the outlet's screw hole. Use the provided outlet screw to attach the bracket to the outlet.

STEP 3
Plug in the power adapter (**Figure 2**).

STEP 4
(Recommended) Lock the adapter in place with the provided zip tie.