

### What is Included:

Angle wedge  
 Battery doorbell  
 Bracket screws (2)  
 Mounting bracket with  
 auxiliary doorbell  
 Reversible Security  
 screwdriver  
 Security screws (4)  
 Wall anchors (2)  
 Wall screws (2)  
 Wireless Doorbell



## Wireless Video Doorbell


The ShieldPro Battery Video Doorbell lets you see and talk to visitors through the panel or mobile app.

Doorbell battery requires occasional recharging.


The Auxiliary Doorbell (see [Figure 2, G.](#)) remains on the wall when you remove the main doorbell for charging. It does not have video capabilities but notifies you through the app and panel when pressed.

FIGURE 1

FIGURE 2

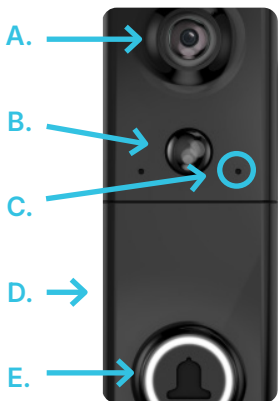



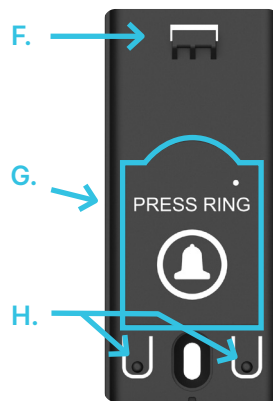



A. Camera  
 B. PIR Sensor  
 C. Microphone  
 D. Charging Port (side)  
 E. Doorbell Button



F. Anchor  
 G. Auxiliary Doorbell  
 H. Security Screws (2)

### LED LIGHTS KEY


Color	Pattern	Description
 Cyan	Flashing	Battery charging
 Blue	Solid	Firmware upgrading
Blue	Pulsing	System booting
Blue	Rapid Flashing	Factory reset: <i>Hold button for 60 seconds</i>
 White	Solid	Ready mode
White	Pulsing	Ready for pairing
White	Flashing	Pairing
White	Rapid Flashing	Wi-Fi reset: <i>Hold button for 20 seconds</i>
 Green	Solid	In-call mode
 Red	Flashing	Alarm triggered
 Yellow	Solid	Pairing failed: <i>Check Wi-Fi credentials</i>
Yellow	Flashing	Power cycle: <i>Hold button for 40 seconds</i>

## Placement Tips

The ideal height is 4 feet above the ground.


If needed, use the optional angle wedge to adjust the camera viewing angle.

FIGURE 3

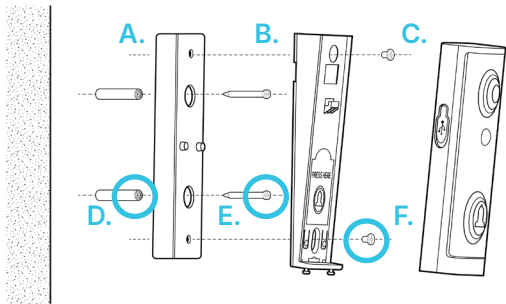

- A. Angle Correction Plate
- B. Wall Mounting Bracket
- C. Doorbell Camera
- D. Expansive Rubber Sleeve
- E. Wall Screws
- F. Mounting Plate Screws

FIGURE 4

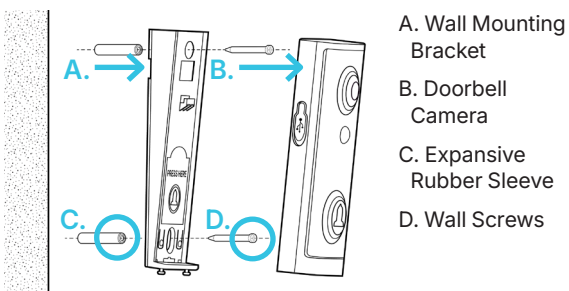

- A. Wall Mounting Bracket
- B. Doorbell Camera
- C. Expansive Rubber Sleeve
- D. Wall Screws



## Before You Begin...

If you are replacing a hardwired doorbell, turn off power to the existing doorbell at the circuit breaker box before installing your new doorbell.

**Verify that the power is off before you start working.**

## Mount your Doorbell

### STEP 1

Prior to starting installation, charge your battery doorbell with a USB-C cable.

### STEP 2

Pair your doorbell with the panel once fully charged. See [LED Lights Key](#) (page 4) for charging status prior to install.

**Settings (☰) > Devices > + > Select Doorbell > Follow the panel's instructions to pair your video doorbell.**

### STEP 3

Use the mobile app or panel to check the field of view before drilling or installing.

### STEP 4

If replacing an existing wired doorbell, *turn off the power at the circuit breaker*. Remove the doorbell, cap the wires, and tuck them into the wall before restoring power.

### STEP 5

If necessary, mark your drill holes with the mounting bracket (or angle wedge). See [Figures 3 and 4](#).

### STEP 6

Screw the bracket (or angle wedge with the bracket) to the wall, using anchors as needed.

### STEP 7

Slide the doorbell onto the anchor until it's flush with the mounting bracket.

### STEP 8

Use the provided screwdriver to secure the doorbell to the bracket with the security screws (see [Fig. 2, H.](#) on page 4). Do not overtighten.

*The provided screwdriver has a reversible head. One side can be used for the security screw.*