Motion Sensor

Set Up Your Motion Sensor

1 **Choose a Location**

Place the sensor at least 6 feet high, away from heat sources, and pointed away from windows.

Clean and dry the mounting area.

2 **Pair the Sensor**

Pull the battery tab.

From the Panel home screen, select Settings (☰) → Devices → Add Device (+) → Motion.

Press the pairing button on the sensor. Name and confirm location.

3 **Install the Sensor**

Peel adhesive and press firmly on the hard plastic casing to install.

Continue to Adjust Sensitivity →

Motion Sensor Video Guide

800-574-7798

www.**shieldpro.com**/setup

4 **Optional: Adjust Sensitivity**

Bypass the sensor on the Security Panel.

Remove the back cover of the sensor.

Adjust jumpers for:

Pet size: up to 33 lb or up to 55 lb

Coverage: 13 ft or 26 ft

Reassemble and reactivate the sensor.

Your Motion Sensor is ready.

Adjust Sensitivity

Pets	Coverage
Up to 33 lbs. 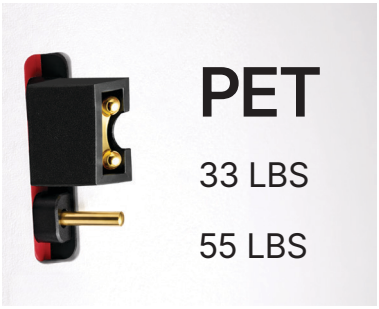	Low - max 13 ft. 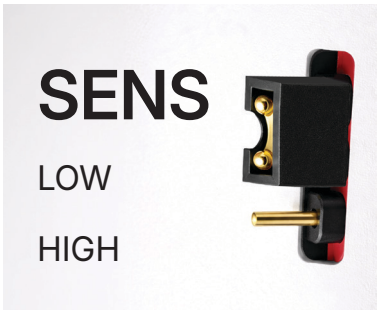
Up to 55 lbs. 	High - max 26 ft.